


## Technical data sheet

### SOLL P10 (fast), SOLL P25 (normal) Paint hardener

#### PRODUCT DESCRIPTION

This is a composition of solvents and resins specially prepared for hardening acrylic and polyurethane paints. Effectively hardens all pigmented varnishes sold in the 2:1 system. Hardened coating gets a high gloss and excellent hardness.

#### TYPES OF HARDENER

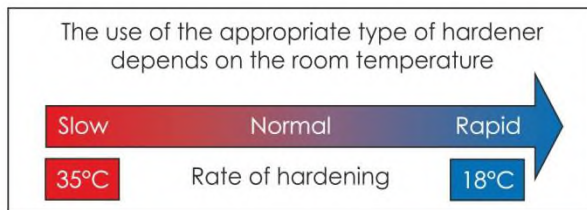

- slow

- normal

- rapid (fast)

The type of used hardener affects coating drying time and depends on room temperature and the preference of the painter. Proper selection of the type of hardener ensures appropriate structure and appearance of coating.

#### RULES OF CONDUCT

Please note that after opening the container with a hardener and mixing it with acrylic paint, you should immediately close it to prevent the hardening reaction in contact with air.

#### STORAGE TIME AND CONDITIONS

Store in tightly closed containers, in a cool, dry place away from sources of fire and heat. Avoid exposure to sunlight.

Shelf life: Min. 12 months from the production date under normal storage conditions and unopened can.

#### CLEANING EQUIPMENT

For cleaning equipment can be used acrylic thinner, universal thinner or nitro thinner.

#### HEALTH AND SAFETY REGULATIONS

See Safety Data Sheet of the product.

#### SPECIFIC WEIGHT

About 1.0 g/cm<sup>3</sup>